




## *High Bays*

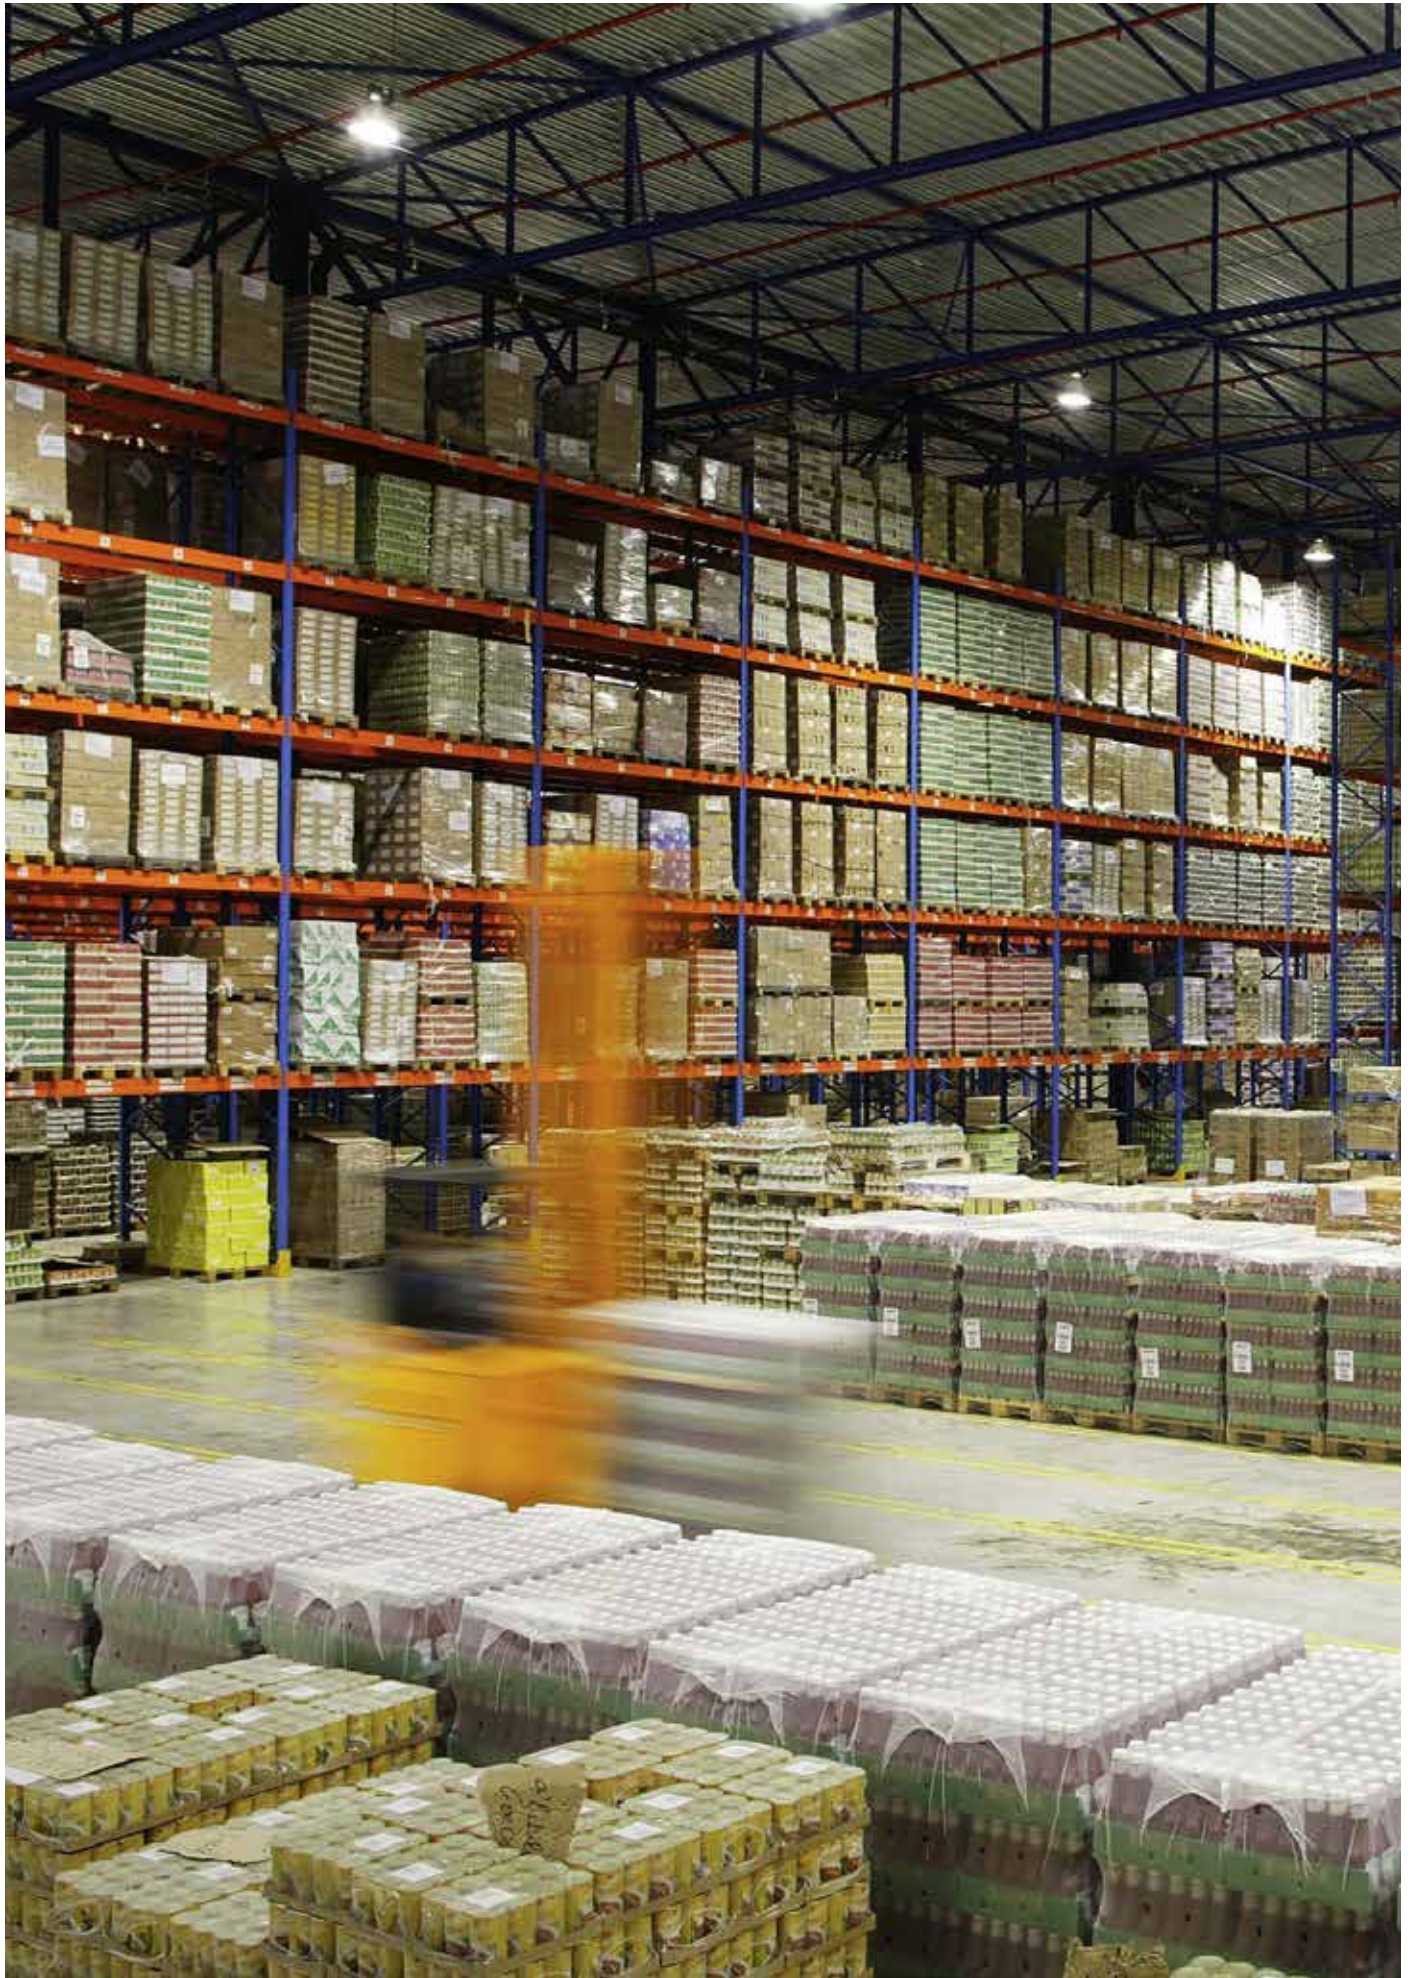

## HIB7 (Rectangular Dimmable)


- LED rectangular dimmable high bay
- Input voltage range: 100-277V AC 50/60Hz
- Meanwell driver inbuilt
- Housing: aluminium alloy
- Diffuser: PC
- LED chips: 168pcs SMD LED
- Power factor: 0.95
- Ambient temp: -20 to 55°C
- **Suitable for dimming (1-10V dimmers)**
- **Recommended dimmer: CLA DIMERIS**
- Suitable for use with PIR/ Microwave sensors



Suitable for use in factories, workshops, warehouses, exhibition halls, gymnasiums & supermarkets



DIMERIS



Part No.	Description	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
HIB7	HI BAY BLK RECT LED DIMM 6000K 150W F&P (1-10V DIMMERS)	6000K	19200lm	150W	80	360X330X65mm	1/1

## HIB11-13 (UFO Style)

- LED high bays
- Input voltage range: 100-277V AC 50/60Hz
- Constant current LED driver inbuilt
- Housing & heatsink: Graphene
- Diffuser: PC
- LED chips: 3030 LED
- Power factor:  $\geq 0.95$
- Flex & plug included
- Ambient temp: -20 to 50°C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with 3 wire motion or Microwave sensors



HIB11



HIB12



HIB13

Part No.	Description	Kelvin	Lumens	Watt	LEDs	CRI	Dimensions	Carton QTY
HIB11	HI BAY UFO LED 100W IP65 90D	5700K	12000lm	100W	140pcs 3030	70	ø280X155mm	1/1
HIB12	HI BAY UFO LED 150W IP65 90D	5700K	18000lm	150W	180pcs 3030	70	ø320X145mm	1/1
HIB13	HI BAY UFO LED 200W IP65 90D	5700K	24000lm	200W	240pcs 3030	70	ø325X160mm	1/1