




Street Lights


FLARE

- LED street flood lights
- Input voltage: 240V AC 50/60Hz
- Housing: die-cast aluminium body
- LED chips: FLARE1A & 2A: 3030 2D LED
FLARE3: 3535 LED
- Power factor: >0.95
- IP67 Sosen SAA approved driver included
- Ambient temperature: -20 to 45°
- Pantone Number: Silver 877C
- Not suitable for dimming
- FLARE1A & 2A are IPART approved

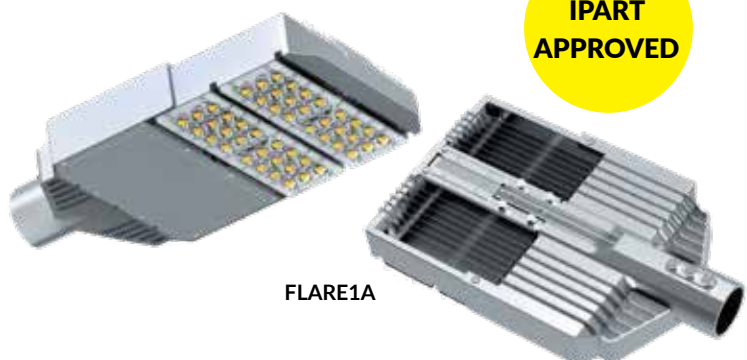

FLARE1A


50,000hr Lifetime	150° Beam Angle	IP66 Rated	IK10 Rated	5YEAR Replacement Warranty
----------------------	--------------------	----------------------	----------------------	---



FLARE1A




FLARE2A



FLARE2A



FLARE3




FLARE3

NOTE: When vertical, the beam angle is 80°



Part No.	Description	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
FLARE1A	STREET LIGHT LED SILVER 60W	5000K	7200lm	60W	>75	292x495x98mm	1/1
FLARE2A	STREET LIGHT LED SILVER 90W	5000K	10800lm	90W	>75	292x587x98mm	1/1
FLARE3	STREET LIGHT LED SILVER 120W	5000K	12000lm	120W	>75	292x679x98mm	1/1

Dimensions for mounting point of FLARE series



	FLARE1A	FLARE2A	FLARE3
Outer diameter of the mounting point	Ø77mm	Ø77mm	Ø77mm
Inner diameter of the mounting point	Ø61mm	Ø61mm	Ø61mm
Net weight	5.8kg	7.0kg	8.2kg
Pantone No.	Silver 877C	Silver 877C	Silver 877C

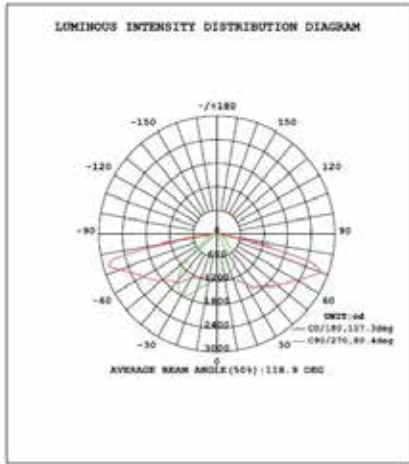

FLARE1A

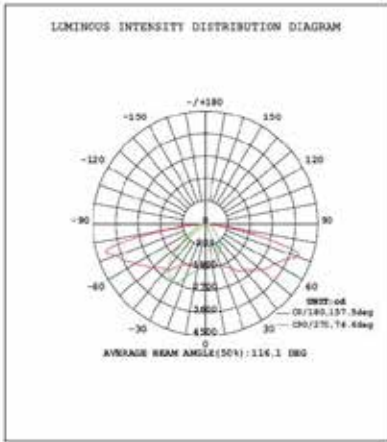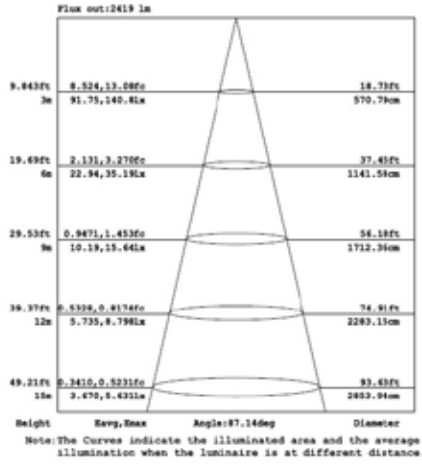

FLARE2A

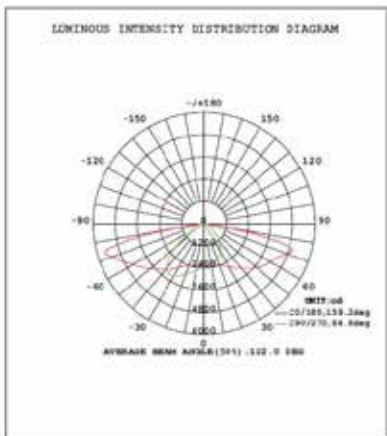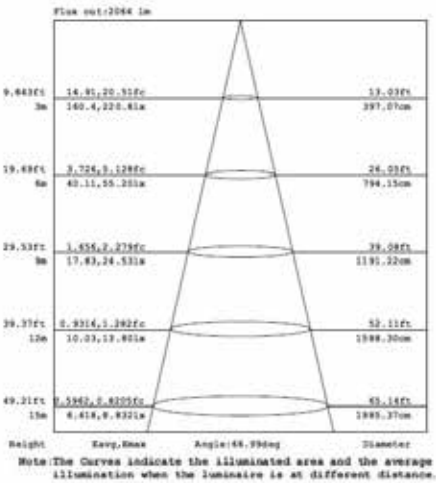

FLARE3

