

BATTENS



RAZORDM



- Interior surface mounted LED dimmable Tri-CCT battens
- Input voltage range: 220-240V AC 50/60Hz
- Constant current inbuilt driver included
- Housing: powder coated aluminium
- Diffuser: PC
- Heat sink: aluminium
- Tri-CCT in one fitting: 3000K/ 4000K/ 5000K
- LED chips: SMD2835
- Power factor: ≥ 0.9
- CRI: > 80
- Ambient temperature: -20 to 40°C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with 3 wire motion or Microwave sensors




Tested & Recommended Dimmers:

Brand	Part No.	PCS per Dimmer
CLA	VELA	RAZORDM001A: 1-10PCS RAZORDM002A: 1-6PCS
DIGINET	LEDsmart: MMDM/BP, MMDM/RT	
Clipsal	Universal: 32ELEDM, 32E450UDM	
HPM	CAT400L, CAT400T	



Central hole in mounting plate



RAZORDM001A



RAZORDM002A

Part No.	Lumens			LED Chips	Watt	CRI	Length	Width	Depth	Carton QTY
	3000K	4000K	5000K							
RAZORDM001A	1500lm	1700lm	1500lm	240pcs 2835	18W	> 80	600mm	75mm	31mm	1/10
RAZORDM002A	3000lm	3400lm	3000lm	480pcs 2835	36W	> 80	600mm	75mm	31mm	1/10


BATTENS001

- Interior LED surface mounted batten with inbuilt sensor
- Input voltage range: 220-240V AC 50/60Hz
- Material: Aluminium & PC
- LED chips: 480pcs SMD2835
- Power factor: ≥ 0.9
- Built in motion activated PIR sensor
- CRI: 82
- Ambient temperature: -20 to 40°C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for 3 wire motion & microwave sensors
- Wired at one end (either rear or side cable entry)
- Mounting feet/spacer removeable



Inbuilt sensor - SENS006:

- The distance to operate the sensor: 5m
- Sensor beam angle: 30 to 150°
- 4 different hold time modes
- Easy set-up switch


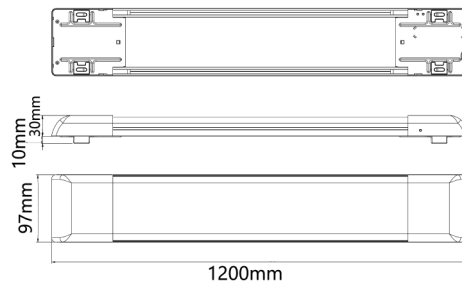


Part No.	Description	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
BATTENS001	BAT LED S/M WH with inbuilt Sensor 5000K 1200mm 4FT	5000K	4500lm	50W	82	1200x97x30mm	1/10

SHIELD

- Exterior LED waterproof batten
- Input voltage range: 220-240V AC
- Base & Diffuser: PC
- LED chips: 2835 LED
- Power factor: >0.9
- Suitable to be used with infrared sensors
- Ambient temperature: -20 to 50°C
- Additional cabling options in baseplate
- Multiple fittings can be installed in a line
- Easy installation
- Large terminal block

30,000hr Lifetime	120° Beam Angle	IP65 Rated	IK08 Rated	3YEAR Replacement Warranty
----------------------	--------------------	----------------------	----------------------	---

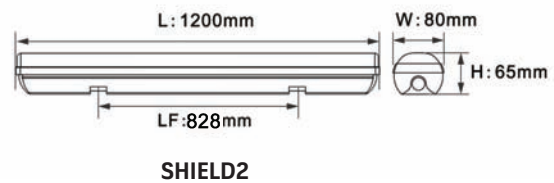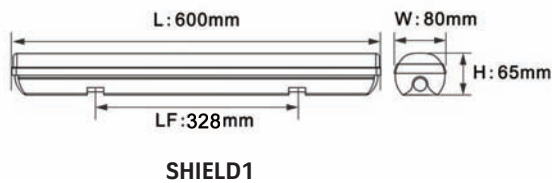

Part No.	Description	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
SHIELD1	BATTEN LED S/M W/PROOF GREY L600mm	5000K	1800lm	20w	>80	600x80x65mm	1/9
SHIELD2	BATTEN LED S/M W/PROOF GREY L1200mm	5000K	3600lm	40w	>80	1200x80x65mm	1/9

Applications:

