

INTERIOR UTILITY LIGHTS



RAZORDM



- Interior surface mounted LED dimmable Tri-CCT battens
- Input voltage range: 220-240V AC 50/60Hz
- Constant current inbuilt driver included
- Housing: powder coated aluminium
- Diffuser: PC
- Heat sink: aluminium
- Tri-CCT in one fitting: 3000K/ 4000K/ 5000K
- LED chips: SMD2835
- Power factor: ≥ 0.9
- CRI: >80
- Ambient temperature: -20 to 40°C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with 3 wire motion or Microwave sensors




Tested & Recommended Dimmers:

Brand	Part No.	PCS per Dimmer
CLA	VELA	RAZORDM001A: 1-10PCS RAZORDM002A: 1-6PCS
DIGINET	LEDsmart: MMDM/BP, MMDM/RT	
Clipsal	Universal: 32ELEDM, 32E450UDM	
HPM	CAT400L, CAT400T	



Central hole in mounting plate



RAZORDM001A



RAZORDM002A

Part No.	Lumens			LED Chips	Watt	CRI	Length	Width	Depth	Carton QTY
	3000K	4000K	5000K							
RAZORDM001A	1500lm	1700lm	1500lm	240pcs 2835	18W	>80	600mm	75mm	31mm	1/10
RAZORDM002A	3000lm	3400lm	3000lm	480pcs 2835	36W	>80	600mm	75mm	31mm	1/10

BATTENS001

- Interior LED surface mounted batten with inbuilt sensor
- Input voltage range: 220-240V AC 50/60Hz
- Material: Aluminium & PC
- Power factor: ≥ 0.9
- LED chips: 480pcs SMD2835
- Built in motion activated PIR sensor
- CRI: 82
- Ambient temperature: -20 to 40°C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for 3 wire motion & microwave sensors
- Wired at one end (either rear or side cable entry)
- Mounting feet/spacer removeable

Inbuilt sensor - SENS006:


- The distance to operate the sensor: 5m
- Sensor beam angle: 30 to 150°
- 4 different hold time modes
- Easy set-up switch


30,000hr
Lifetime


160°
Beam Angle


IP20
Rated

3YEAR
Replacement
Warranty

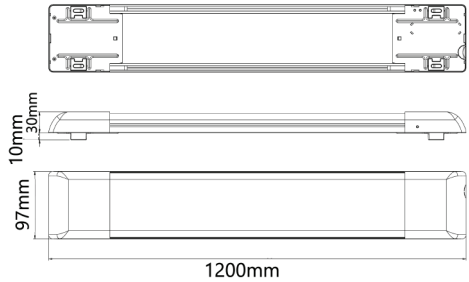


Part No.	Description	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
BATTENS001	BAT LED S/M WH with inbuilt Sensor 5000K 1200mm 4FT	5000K	4500lm	50W	82	1200x97x30mm	1/10


- Interior LED Tri-CCT linkable T5 Slimline lights
- Input voltage range: 220-240V AC 50/60Hz
- Inbuilt driver
- Housing: PC
- Mounting plate: aluminium
- LED chips: SMD2835
- Tri-CCT in one fitting: 3000K / 4000K / 5700K
- Slide switch on side
- CRI: ≥80
- Power factor: >0.9
- Flex & plug not included
- Not suitable for dimming
- Ambient temperature: -15 to 40°C

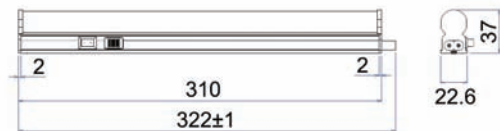

LINKTRI01

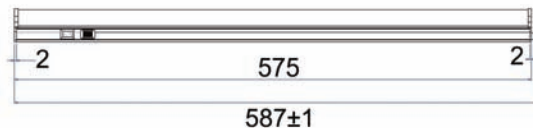

LINKTRI02



LINKTRI03

Part No.	Description	Lumens			Watt	CRI	Width	Depth	Depth	Carton QTY
		3000K	4000K	5700K						
LINKTRI01	LINKABLE LED SLIM 4W TRI	380lm	420lm	400lm	4W	80	22.6mm	322mm	37mm	
LINKTRI02	LINKABLE LED SLIM 9W TRI	855lm	945lm	900lm	9W	80	22.6mm	587mm	37mm	
LINKTRI03	LINKABLE LED SLIM 18W TRI	1710lm	1890lm	1800lm	18W	80	22.6mm	1187mm	37mm	
LINKTRICN	LINKABLE LED SLIM CONNECTOR 220mm FOR LINKTRI SERIES									
LINKTRIFP	LINKABLE LED SLIM CONNECTOR 220mm FOR LINKTRI SERIES									

UNDER BENCH UTILITY LED LIGHTS

- Interior LED under bench utility lights
- Input voltage: 12V DC
- Plugs into DC power supply or 12V battery
- Surround for round fitting is white
- Surround for RGB & Square fitting is stainless steel
- The fittings come with 2.45m cable
- LED chips: Everlight 3020 LED
- Extremely low power consumption
- Equivalent to 15W halogen output
- Quick and easy D.I.Y. installation
- Included screws and double sided tape
- No UV / IR radiation
- Single colour dimmable with CLAKZQ9B or CLAKZQ5
- RGB colour dimmable with CLAKZQ9A



CLALEDRNDSCUBRGB



CLALEDSQSCUB




CLALEDRNDWHUB

Part No.	Description	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
CLALEDRNDSCUBRGB	CABINET UNDERBENCH LED 12V DC S/M RND S/C RGB	RGB	-	1.2W	85	Ø50x6mm	1/100
CLALEDRNDWHUBWW	CABINET UNDERBENCH LED 12V DC S/M RND WH	3000K	48lm	1.4W	85	Ø50x6mm	1/100
CLALEDSQSCUBWW	CABINET UNDERBENCH LED 12V DC S/M SQ S/C	3000K	44lm	1.4W	85	52x52x6mm	1/100
CLALEDSQSCUBCW	CABINET UNDERBENCH LED 12V DC S/M SQ S/C	5000K	52lm	1.4W	85	52x52x6mm	1/100

LED UTILITY LIGHTS ACCESSORIES



OTTER1

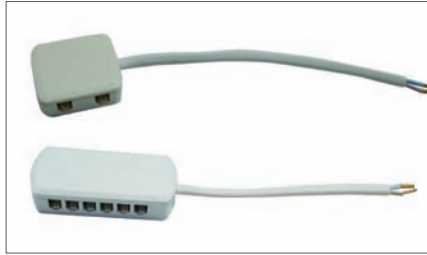

CLAJB4A,6A,12A



CLARGBCONTROLLER



CLAKZQ5



CLAKZQ9A



CLAKZQ9B


Part No.	Description	Carton QTY
OTTER1	DRIVER LED 12V DC C/VOLT 1-12W IP67 WP 1	1/1
CLAJB4A	4-WAY JUNCTION BOX FOR SINGLE COLOUR LED UNDER BENCH UTILITY LIGHT	1/1
CLAJB6A	6-WAY JUNCTION BOX FOR SINGLE COLOUR LED UNDER BENCH UTILITY LIGHT	1/1
CLAJB12A	12-WAY JUNCTION BOX FOR SINGLE COLOUR LED UNDER BENCH UTILITY LIGHT	1/1
CLARGBCONTROLLER	RGB CONTROLLER IN LINE WITH 4-WAY JUNCTION BOX	1/1
CLAKZQ5	SINGLE COLOUR LED DIMMER & KNOB SWITCH	1/1
CLAKZQ9A	RGB LED RECEIVER & REMOTE CONTROLLER MAX.30W (1 FITTING ONLY)	1/1
CLAKZQ9B (incl. CLAKZQ9BCABLE)	SINGLE COLOUR LED RECEIVER & REMOTE MAX.15W	1/1

Applications:



NIGHT01

- Interior LED utility wall night light
- Input voltage: 220-250V AC
- Inbuilt LED driver
- Automatically Turns on at dusk and off at dawn
- No batteries required
- Rotates through 360° to light any direction
- For indoor use only



1. For best results, use in a place with ample natural light, unobstructed by window furnishings
2. To use safely, ensure the night light is fully inserted into socket
3. The photoelectric eye will sense fading light and automatically switch the night light on and off again as natural light return

Part No.	Description	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
NIGHT01	WALL INTERNAL LED PLUG IN NIGHTLIGHT	6500K	28lm	0.2w	-	72X54mm	12/96