




GENERAL LIGHTING
INTERIOR UTILITY LIGHTS

BATTENS Interior Utility Lights

- Interior LED surface mounted batten with inbuilt sensor
- Input voltage range: 220-240V AC 50/60Hz
- Material: Aluminium & PC
- LED chips: 480pcs SMD2835
- Power factor: ≥ 0.9
- Built in Microwave sensor
- CRI: 82
- Ambient temperature: -20 to 40°C
- Not suitable for dimming
- Suitable for 2-way switching
- Wired at one end (either rear or side cable entry)
- Mounting feet/spacer removeable



BATTENS001

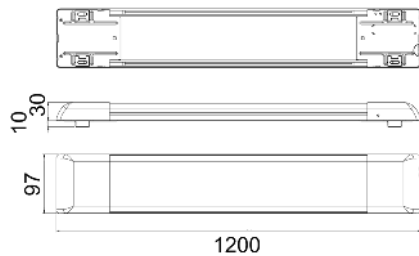


Inbuilt sensor:

- The distance to operate the sensor: 5m
- Sensor beam angle: 30 to 150°
- 4 different hold time modes
- Easy set-up switch



Part No.	Description	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
BATTENS001	BAT LED S/M WH with inbuilt Sensor 1200mm 4FT	5000K	4500LM	50W	82	1200x97x30mm	1/10

RAZORDM Interior Utility Lights





- Interior LED dimmable Tri-CCT surface mounted battens
- Input voltage range: 220-240V AC 50/60Hz
- Constant current inbuilt driver included
- Housing: powder coated aluminium
- Diffuser: PC
- Heat sink: aluminium
- Tri-CCT (3000K/ 4000K/ 5000K) in one fitting
- LED chips: SMD2835
- Power factor: ≥ 0.9
- CRI: >80
- Ambient temperature: -20 to 40°C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with 3 wire motion or Microwave sensors




Tested & Recommended Dimmers:

Brand	Part No.
DIGINET	LEDSmart: MMDM/BP, MMDM/RT
Clipsal	Universal: 32ELEDM, 32E450UDM
HPM	CAT400L, CAT400T

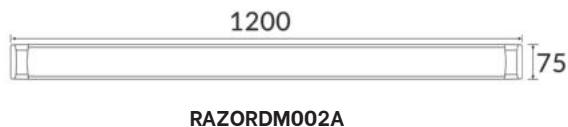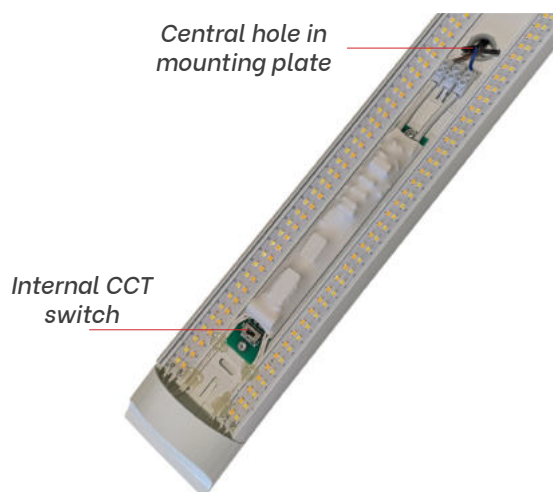

Part No.	Lumens			LED Chips	Watt	CRI	Length	Width	Depth	Carton QTY
	3000K	4000K	5000K							
RAZORDM001A	1500LM	1700LM	1500LM	240pcs 2835	18W	>80	600mm	75mm	31mm	1/10
RAZORDM002A	3000LM	3400LM	3000LM	480pcs 2835	36W	>80	1200mm	75mm	31mm	1/10



- Interior LED Surface Mounted Dimmable Tri-CCT Battens (Wide)
- Input voltage: 220-240V AC 50/60Hz
- Inbuilt driver included
- Diffuser: PC (white)
- Housing: powder coated aluminium
- Heatsink: aluminium
- High power factor: ≥ 0.9
- Tri-CCT (3000K/ 4000K/ 5000K) in one fitting
- Internal switch (under diffuser)
- Central hole in mounting plate
- LED chips: SMD2835
- CRI: >80
- Ambient temperature: -20 to 40°C
- Suitable for dimming with most trailing edge dimmers
- Suitable for 2-way switching
- Suitable for use with 3 wire Microwave & Motion sensors

Wide Housing: 120mm




Central hole in mounting plate

Internal CCT Switch




Tested & Recommended Dimmers:

Brand	Part No.
CLIPSAL	32E450TM, 32E450UDM 32ELEDM 400W 41E300PBUD2SM-VM
HPM	Cat 400L, Cat400T, MMDM/BP400W, MMDM(RT)400W



RAZORDMW001



RAZORDMW002

Part No.	Description	Lumens			Watt	CRI	Power Factor	Dimensions	Carton QTY
		3000K	4000K	5000K					
RAZORDMW01	BATTEN LED S/M WH DIMM Central Hole 1700Lm TRI	1500LM	1700LM	1500LM	18W	>80	≥ 0.9	600x120mm	1/10
RAZORDMW02	BATTEN LED S/M WH DIMM Central Hole 3400Lm TRI	3000LM	3400LM	3000LM	36W	>80	≥ 0.9	1200x120mm	1/10



- Interior LED Tri-CCT linkable T5 slimline lights
 - Input voltage range: 220-240V AC 50/60Hz
 - Inbuilt driver
 - Housing: PC
 - Mounting bracket: aluminium
 - LED chips: SMD2835
 - Tri-CCT in one fitting: 3000K / 4000K / 5700K
 - Slide switch on side
 - CRI: ≥80
 - Power factor: >0.9
 - Flex & plug and connecting cables sold separately
 - Hardwire connecting cable and mounting bracket included in the box
 - Not suitable for dimming
 - Ambient temperature: -15 to 40°C
 - Note: All LINKTRI models can be used together.
- Maximum connection wattage: 150W




15mm hardwire connecting cable included in the box





LINKTRICN




LINKTRIFP

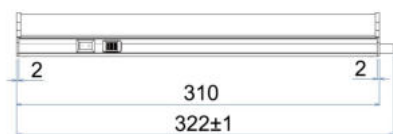

LINKTRIO1

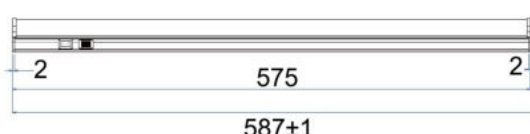

LINKTRIO2




LINKTRIO3

Part No.	Description	Lumens			Watt	CRI	Width	Length	Depth	Carton QTY
		3000K	4000K	5700K						
LINKTRIO1	LINKABLE LED SLIM 4W TRI	380LM	420LM	400LM	4W	80	22.6mm	322mm	37mm	1/40
LINKTRIO2	LINKABLE LED SLIM 9W TRI	855LM	945LM	900LM	9W	80	22.6mm	587mm	37mm	1/40
LINKTRIO3	LINKABLE LED SLIM 18W TRI	1710LM	1890LM	1800LM	18W	80	22.6mm	1187mm	37mm	1/40
LINKTRICN	LINKABLE LED SLIM CONNECTOR 220mm (22cm) FOR LINK TRI SERIES									
LINKTRIFP	LINKABLE LED SLIM F&P 2 PIN 1.2M CABLE FOR LINK TRI SERIES									

NIGHT Interior Utility Lights

- Interior LED utility wall night light
- Input voltage: 220-250V AC
- Inbuilt LED driver
- Automatically Turns on at dusk and off at dawn
- No batteries required
- Rotates through 360° to light any direction
- For indoor use only



1. For best results, use in a place with ample natural light, unobstructed by window furnishings
2. To use safely, ensure the night light is fully inserted into socket
3. The photoelectric eye will sense fading light and automatically switch the night light on and off again as natural light return

Part No.	Description	Kelvin	Lumens	Watt	CRI	Dimensions	Carton QTY
NIGHT01	WALL INTERNAL LED PLUG IN NIGHTLIGHT	6500K	28LM	0.2w	-	72X54mm	12/96