


# KHEPRI

## Exterior LED Sensor Surface Mounted Cylinder Wall Light IP54

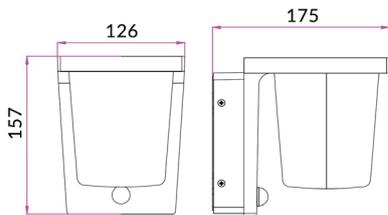

### Product Features:

- Input voltage range: 100-240V AC 50/60Hz
- Inbuilt Constant Current LED driver
- Housing & heatsink: aluminium
- Diffuser: PC
- Mounting plate: aluminium
- LED chips: 12pcs 2835
- Power factor: >0.7
- CRI: >80
- Ambient temperature: -20 to 50°C
- Not suitable for dimming
- Suitable for 2-way switching

### Sensor Details

- Sensor type: infrared
- Installation height: 1.8-2.5m
- Detection angle: 120° / 360°
- Motion detection distance: 3-6m
- Motion detection speed: 0.6-1.5m/s
- Hold time: 5s, 30s, 1m, 3m, 5m, 8m (adjustable)



Part No.	KHEPRI01
Description	WALL LED SENSOR S/M Cylinder Dark Grey
Material	Powder coated Aluminium
LED chips	12pcs 2835
Kelvin	3000K
Lumens	730lm
Wattage	13.5W (Incl driver draw)
Power factor	>0.7
CRI	>80
Beam angle	174°
Dimension	H157mm x W126mm x D175mm
Back plate	157x126mm
Weight	1.4kg
Box	19x17x14cm
Carton QTY	1/8

